



The Aspect XL is an energy-efficient, space heating solution for large indoor spaces looking for a powerful yet comfortable heating solution. It is particularly suited for those interiors with higher, or vaulted, ceilings or less well-insulated areas and which are also seeking an aesthetically pleasing heating solution. With zero light, the Aspect XL is an ideal solution for larger domestic spaces as well as office reception areas, shops, hotels, restaurants, and anywhere within the public eye.

Utilising specially developed ceramic emitters in a sleek, black powder-coated stainless steel body, the Aspect XL projects the cosy feeling of far infrared heat forwards to result in effective, efficient comfort.

Available in four sizes, the stylish Aspect XL1 (650W), Aspect XL2 (1300W), Aspect XL3 (1950W) and Aspect XL4 (2600W) can all be wall and ceiling-mounted to provide a tasteful and versatile heating solution for interiors.


Manufactured in the UK, using British Stainless Steel, and supplied in recyclable packaging, the Aspect XL has no servicing requirement and can be powered by renewables or a green energy tariff to deliver a net zero heating solution, aiding in the delivery of net zero targets.



The Aspect XL should be used in conjunction with an iQ thermostat.

Available Models

| Part Number | Rated Power | Dimensions | Weight | Heated Zone m ² |
|-------------|-------------|-------------|---------|----------------------------|
| IRXL1-650 | 650W | 30 x 14 cm | 1.85 kg | 3 - 6 Indoors |
| IRXL2-1300 | 1300W | 55 x 14 cm | 3.7 kg | 6 - 9 Indoors |
| IRXL3-1950 | 1950W | 82 x 14 cm | 5.5 kg | 9 - 12 Indoors |
| IRXL4-2600 | 2600W | 110 x 14 cm | 7.4 kg | 12 - 18 Indoors |

Technical Details

| | |
|-------------------------|---|
| Heating Element | 1, 2, 3 or 4 Ceramic longwave Infrared emitters |
| Voltage | 220 - 240V 50/60Hz |
| Body | Black powder-coated Stainless Steel |
| Warm Up Time | <5 Minutes |
| Useful Wavelength Range | 3 - 10µm |
| IP Rating | IPX4 |
| Cable | 1.5m |
| Certificates |  |
| Warranty | 5 years |

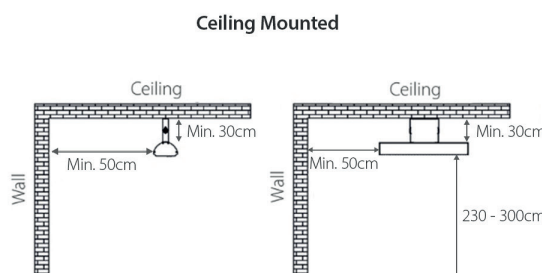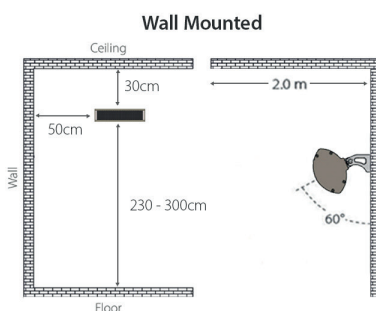

IMPORTANT

In exposed areas with air movement/wind, the far infrared spread may reduce by 1/3 to 1/2. Heated zones are based on recommended mounted heights. Please refer to the Herschel ASPECT XL Installation Manual before installation and for guidance on heated zones and heat intensity at alternative mounting heights. The Herschel Aspect XL rises to very high temperatures in use and the unit (in particular the heater elements) must not be touched when power is applied. After switch off the elements remain hot for a considerable time and the unit should not be touched for a minimum of 30 minutes. NEVER use the heater to ignite materials.

The Herschel Aspect XL is guaranteed against failure due to faulty materials or workmanship for five years from the date of purchase and the ceramic elements are warranted for 12 months. In the unlikely event of failure of the unit within this time, the unit must be returned to the supplier for repair or replacement. Refer to the warranty policy on Herschel-infrared.co.uk for more detail including exclusions. The guarantee is invalid if the correct installation instructions have not been adhered to.

Do not operate if supply voltage exceeds 240 volts.