

## SPEC SHEET

# ZIP HYDROCHILL HC20 PUSH BUTTON



FILTERED | CHILLED | AMBIENT

Professional performance in a robust and stylish, stainless steel package - the HydroChill HC20 gives the best user experience for high capacity demand from hospitality to baristas and restaurateurs.

The HC20 range gives you the option to cater for the numbers of people you by choosing from the 80 or 150 litre per hour versions delivering the purest tasting water with the included Zip MicroPurity HD 3 micron filtration package.

Available for counter top installation or on matching, floor-standing cabinet (80l/ph only).



Model	Water function	Tap style	Ultra violet	Capacity (L/hr)	Rating (kW @230V)	Dimensions (MM) W x D x H
HC20CIT80	Chilled / ambient*	Button Control	Optional	80	0.53	360 x 565 x 502
HC20CIT150	Chilled / ambient*	Button Control	Optional	150	0.875	460 x 606 x 542

\*Ambient describes the temperature of the water where there is no additional heating or chilling of the incoming cold water supply. You may need to run the tap for a while to get a suitable temperature.

## FEATURES & BENEFITS

### ICE BANK TECHNOLOGY

Stainless steel coil (double coil on 150 model)

### 2 DISPENSING OPTIONS

Filtered chilled and filtered ambient water

### MODERN COMPACT DESIGN

In strong and durable stainless steel

### FAST & EASY INSTALLATION

For office use

### FILTRATION

HCF3 Zip High Capacity Taste & Odour Installation Kit, 3 Micron, 17,000 Litres

### PORTION CONTROL

As standard

### DRIP TRAY

Included



## SPECIFICATION TYPE

Cooling technology	ICE BANK - Single Stainless Steel coil (double coil on 150 model)
Cold water temperature range	5° - 12° C
Materials	Fabricated from robust stainless steel
Environment	5°C - 42°C climate
Refrigerant gas	Natural gas R290



**WARNING** R290 is a CFC free, environmentally friendly but highly flammable gas. The product should be installed and operated within the instructions in the supplied manual.

## CAPACITY, WEIGHTS & DIMENSIONS

Cooling capacity (litres per hour)	80	150
Continuous supply	45	80
Unit dimensions (W x D x H) mm	360 x 565 x 502	460 x 606 x 542
Product weight - empty / full (kg)	35 / 38	44/49

## ELECTRICAL

Voltage supply	230 V (50Hz)
Power supply options	1 x 13 amp socket outlet
Installation	Must comply with current IEE regulations

## PLUMBING

Wholesome cold water inlet supply required	Yes
Supply pressure range	0.25 MPa (2.5 bar) - 0.35 (3.5 bar)
Inlet water pipe (mm)	Ø15 Male connection
Installation	Must comply with current water supply regulations

## FILTRATION

Taste & Odour Filtration kit - supplied	HCF3 - Zip MicroPurity filter HD, 3 Micron - 80 l/ph HCF4 - Zip MicroPurity filter HD, 3 Micron - 150 l/ph
Sterilising UV filtration module (optional)	Kills bacteria, viruses, moulds, algae

## WARRANTY

2 years on-site parts and labour on site	Terms and conditions apply (see supplied manual)
--	--

## HYDROCARE

Commercial - Yearly Plan	Full breakdown cover including parts and labour 4 monthly filter exchange & sanitisation for units Comprehensive preventative maintenance cover
--------------------------	---

## ACCESSORIES


Pressure reducing valve*	Zip Part Number AQ3
Floor Standing Cabinet	Available for 80l/ph model only Zip Part Number 94778

\*Required when incoming pressure is higher than 3.5 bar

## HYDROCHILL DRAWINGS & DIMENSIONS

---

### HC20CIT80

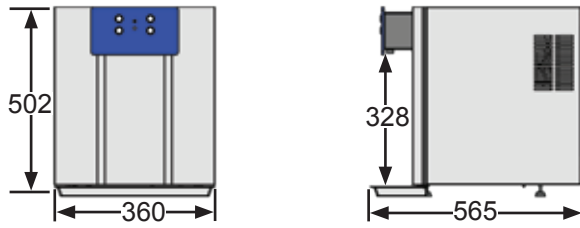

### HC20CIT150

